

FE60-166M(L)


High Efficiency Low LID with Half-cut Technology

NEW

Big Size: Cell 166*83

Monocrystalline

360W / 365W / 370W / 375W / 380W

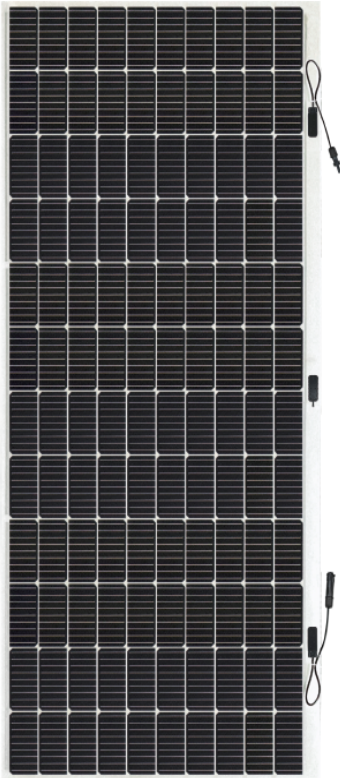

- **Module Efficiency:**
20.2%
- **No.of Cells:**
120 (6 x 20)
- **Weight:**
5.4kg
- **Dimensions:**
2046mmx915mmx2mm



Fellow New Energy Intelligent Equipment Co.Ltd www.Fellowenergy.com

Factory: HT FELLOW ENERJI A.Ş.
Factory: CHEN GUNES ENERJISI SANAYI VE TICARET LIMITED SIRKETI



Half cut cell technology can reduce the internal power loss and improve component overall power. Excellent heat dissipation avoids hot spot production. Low LID Bifacial PERC with Half-cut Technology

Fast-Installation

Through "Quick-Bonding" installation, LTF requires no penetration, reduces time on roof and saves installation costs.

12Ys

Products Warranty

Safety

Integration with underlying installation surface, ensuring the waterproof performance and safety performance of the roof.

25Ys

Warranty on power output

Flexibility

The biggest advantage of flexible photovoltaic modules is that they can be bent and folded, which allows them to adapt to more application scenarios.

Ultra-light

Glass free module weighs 5.4kg, 70% lighter than conventional glass modules.

5W

Positive tolerance 0/+5W guaranteed

PID

PID Resistant


Comprehensive and first-rate certification system

IEC61215 : 2016. IEC61730 : 2016 Latest Standard and UL 61730 Latest Standard, ISO9001 ISO14001 and ISO45001, meeting the highest international standards Strict quality control



*Copyright@2023V0Plus Specifications are subject to change without further notification

Engineering Drawing

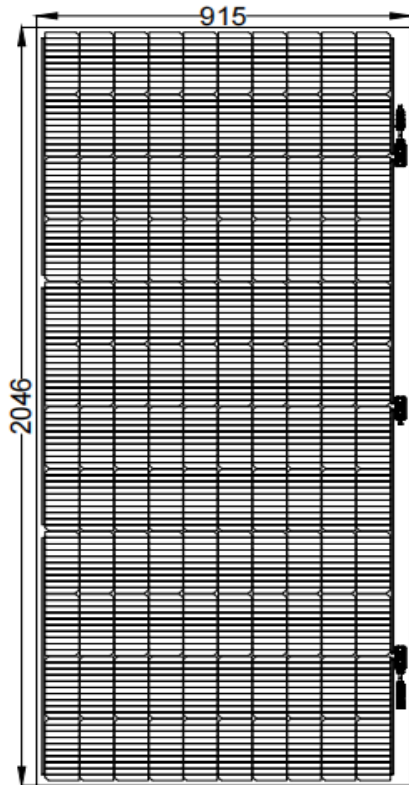

Electrical Characteristics (STC)

Module Type	FE60-166M(L)				
Maximum Power(Pmax)	360W	365W	370W	375W	380W
Open Circuit Voltage(Voc)	41.1V	41.3V	41.5V	41.6V	41.7V
Short Circuit Current(Isc)	11.53A	11.63A	11.72A	11.85A	11.98A
Maximum Power Voltage(Vmp)	33.7V	33.9V	34.1V	34.2V	34.3V
Maximum Power Current(Imp)	10.68A	10.76A	10.85A	10.96A	11.07A
Module Efficiency(%)	19.2%	19.4%	19.7%	20.0%	20.2%
Power Tolerance	0/+5W				
Maximum System Voltage	1500V DC(IEC)				
Maximum Series Fuse Rating	20A				
Operating Temperature	-40°C to +85°C				

*STC: AM 1.5, Irradiance 1000W/m², module temperature 25°C


Electrical Characteristics(NMOT)

Module Type	FE60-166M(L)				
Maximum Power(Pmax)	274.8W	278.5W	282.4W	286.3W	230.2W
Open Circuit Voltage(Voc)	42.07V	42.17V	42.35V	44.09V	44.19V
Short Circuit Current(Isc)	8.18A	8.22A	8.27A	8.30A	8.34A
Maximum Power Voltage(Vmp)	35.95V	36.23V	36.51V	37.21V	37.51V
Maximum Power Current(Imp)	7.65A	7.69A	7.74A	7.78A	7.82A


NMOT 45°C ±2°C

*NMOT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s

IV Curves

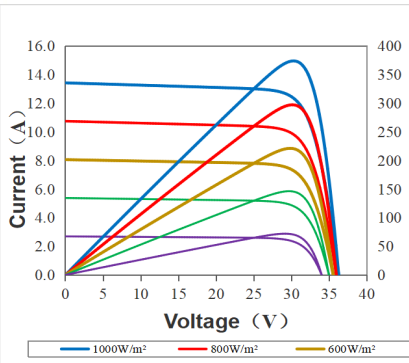

Warranty

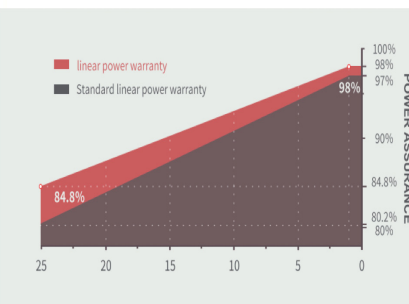

Temperature Coefficient of Pmax	Y(Pm)	-0.350%/°C
Temperature Coefficient of Voc	β(Voc)	-0.275%/°C
Temperature Coefficient of Isc	α(Isc)	+0.045%/°C
Solar Cells	Monocrystalline 166 x 83mm	
No. of Cells	120 (6×20)	
Dimensions	2046mm×915mm×2mm	
Weight	5.4kg	
Backboard	White	
Frame	Frameless	
Junction Box	IP68	
Cable	4mm ² (IEC)Length: (+)400mm, (-)200mm/length can be customized	
Connectors	MC4/MC4 Compatible	
Packaging Configuration	61pcs/box	

*The module recycling should be carried out by the professional institutions at the end of module life cycle

*Copyright@2023V0 Plus Specifications are subject to change without further notification